JUAL

VAPOUR BARRIER ROOF OUTLET



PRODUCT DESCRIPTION

Type Tested and Monitored

TÜVRheinland CERTIFIED

www.tuv.com ID 1111230470

JUAL Vapour Barrier Roof Outlet

APPLICATIONS:

The vapour barrier roof outlet is installed in the vapour barrier level of the roof where it secures a waterproof penetration of the barrier.
The diameter of the vapour barrier roof outlet pipe is expanded and supplied with an internal rubber sealing ring and this serves as a socket for a standard roof outlet which is inserted in the top roof level.
Notice: The standard roof outlet must be ordered separately.


Model with short socket can be used in areas with little space – Pipe section can be cu off to fit.

MATERIALS:
Fully welded pipe and assembly ring of acid proof stainless steel AISI 316 / EN 1.4401.
Flange of stainless steel AISI 304/EN 1.4301.
Gasket: EPDM- rubber
Integrated vapour barrier of SBS-Bitumen felt, APP bitumen felt or Synthetic membrane in accordance with the membrane list (can be found at www.jual.dk).


Installation and application must be conducted in accordance with current industry standards and compatibility with the roof's membrane must be secured.


TECHNICAL INFORMATION / ARTICLE NUMBERS

Long Socket L2=205mm

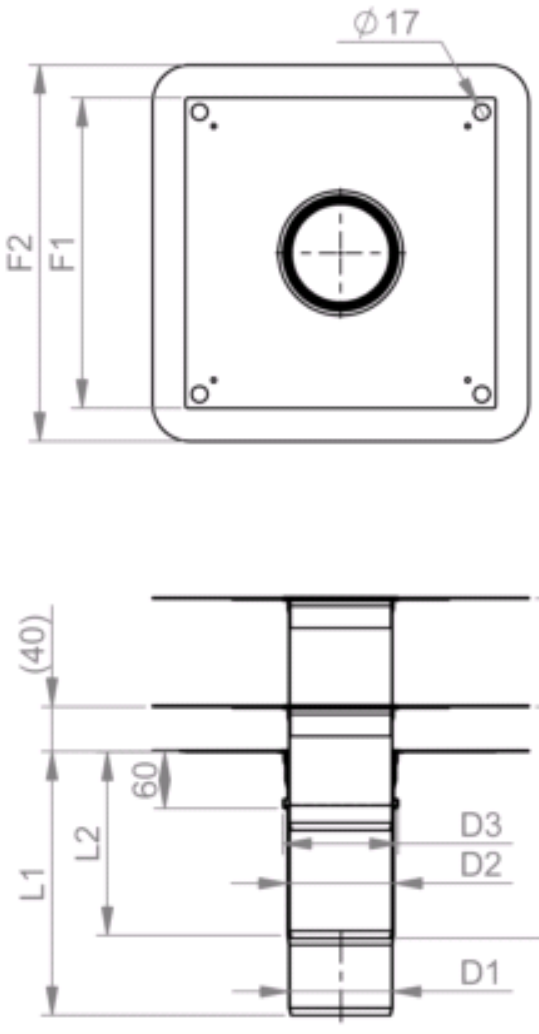

Short Socket "**S**" L2=105mm

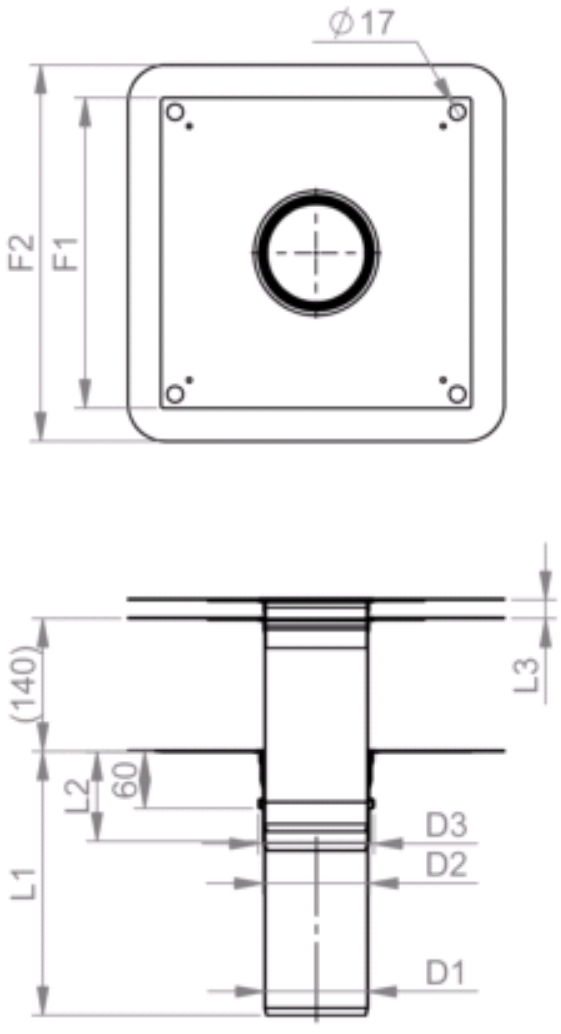

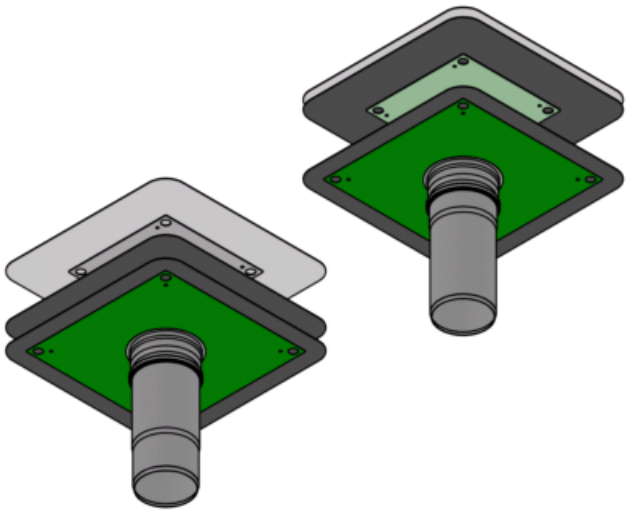

JUAL Vapour Barrier Outlet illustrated with Single ply membrane and a JUAL vertical outlet inserted.
JUAL Vapour Barrier Outlet are delivered with integrated single ply or Bitumen membrane

ARTICLE NUMBER.	D1	**D2**	D3	L1	L2	VERTICAL OFFSET L3	FLANGE F1	MEMBRAN F2	KG.
63075-280-xxx	Ø75	Ø78	Ø87,3	280	205	125	**Tagpap:** 230x230 **Synthetic Membrane**: 230x230 **Steel:** 330x330	**Bitumen Felt:** 500x500 **Synthetic Membrane:** Dep. of membrane type 330x330 350x350 400x400	1,53
63075-280S-xxx					105	40			
63075-585S-xxx				585					1,98
63090-280-xxx	Ø90	93	102,0	280	205	125			1,61
63090-280S-xxx					105	40			
63090-585S-xxx				585					2,15
63110-280-xxx	Ø110	Ø113	Ø122,9	280	205	125			1,72
63110-280S-xxx					105	40			
63110-585-xxx				585					2,38
63125-280-xxx	Ø125	Ø128	Ø139,8	280	205	125			1,81
63125-280S-xxx					105	40			
63125-585S-xxx				585					2,56
63160-280-xxx	Ø160	Ø163	Ø174,2	280	205	125	**Bitumen. Felt / Synthetic Membrane** 330x330 **Steel**: 380x380		2,59
63160-280S-xxx					105	40			
63160-585S-xxx				585					4,4

APPROVALS

The Vapour barrier roof outlet is approved and certified according to EN-1253 and EN-1124, which specifies requirements for construction and function, and manufactured in accordance with DIN 18200, which specifies requirements for serial production.
LGA Certificate no.: 572(year)060 – can be found at www.jual.dk.