
JUAL

RECTANGULAR ROOF OUTLET – 90° BENT FLANGE



With bituminous roof membrane

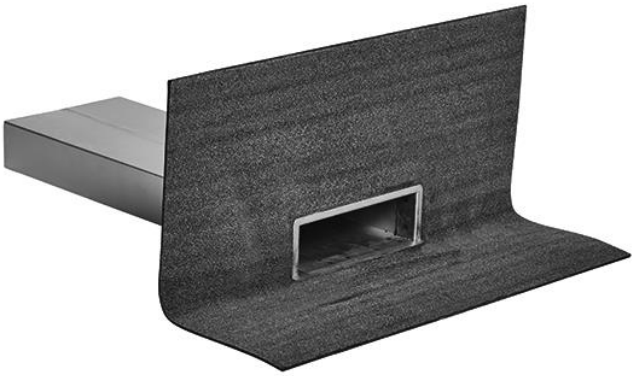

With synthetic roof membrane

PRODUCT DESCRIPTION


JUAL Rectangular Roof Outlet – 90° bent flange

APPLICATION:
For drainage of flat roofs with bitumen membrane.
Made with 90° bent flange for installation at roof level.
NOTICE: In case the standard outlet pipe is too short to penetrate the facade of the building, the horizontal outlet pipe can be extended by welding at JUAL


MATERIALS:
Pipe and protection ring in acid-proof stainless steel AISI 316/EN 1.4401.
Flange in stainless steel AISI 304/EN 1.4301
Roof membrane factory integrated: Bituminous membrane SBS/APP etc. and synthetic roof membranes.


Installation and application must be conducted in accordance with current industry standards and compatibility with the membrane of the roof must be secured.


TECHNICAL INFORMATION / ARTICLE NUMBERS

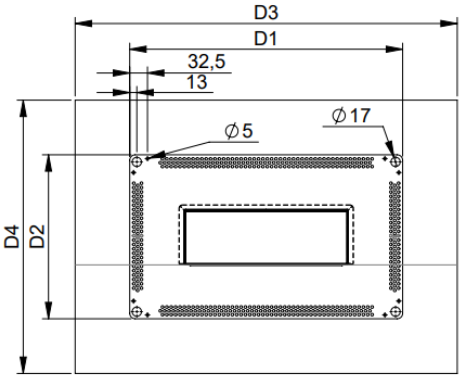


Show with plane flange with bituminous roof membrane



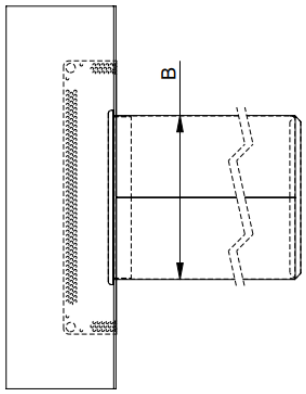

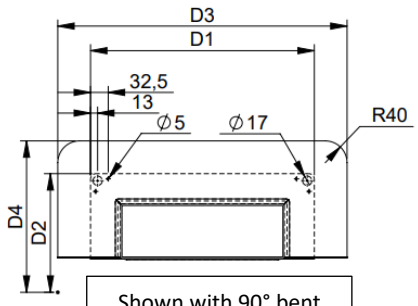

Shown with 90° bent flange with synthetic roof membrane

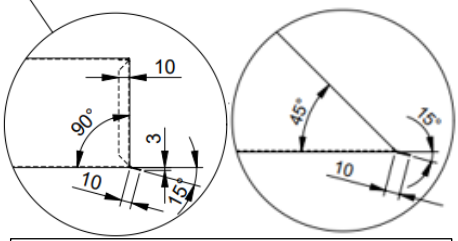

*Water drop edge on dimension from 150x50mm

Form 68: 90° Pipe end shape

Form 69: 45° Pipe end shape

Article no.			D1		D2		D3		D4		*Kg	
Form 68 90° Pipe end	Form 69 45° Pipe end	Dimension BxHxL	Bitum. 1XX	Synt. 2XX	Bitum. 1XX	Synt. 2XX	Bitum. 1XX	Synt. 2XX	Bitum. 1XX	Synt. 2XX	Bitum.	Synt.
680770560400-xxx	690770560400-xxx	*77x56x400	277	÷S	230	÷S	500	÷S	500	÷S	3	÷S
680770560600-xxx	690770560600-xxx	*77x56x600									3,9	
680770561000-xxx	690770561000-xxx	*77x56x1000									3,5	
680950560400-xxx	690950560400-xxx	*95x56x400	295	÷S	230	÷S	500	÷S	500	÷S	3,7	÷S
680950560600-xxx	690950560600-xxx	*95x56x600									3	
680770561000-xxx	690770561000-xxx	*95x56x1000									3,8	
681500500400-xxx	691500500400-xxx	150x50x400	350	÷S	250	÷S	600	÷S	500	÷S	3,3	÷S
681500500600-xxx	691500500600-xxx	150x50x600									3,8	
681500501000-xxx	691500501000-xxx	150x50x1000									4,8	
681501000400-xxx	691501000400-xxx	150x100x400	350	÷S	300	÷S	600	÷S	500	÷S	3,6	÷S
681501000600-xxx	691501000600-xxx	150x100x600									4,3	
681501001000-xxx	691501001000-xxx	150x100x1000									5,5	
681600600400-xxx	691600600400-xxx	160X60x400	350	270	300	170	600	390	500	290	3,4	1,7
681600600600-xxx	691600600600-xxx	160X60x600									3,8	2,3
681600601000-xxx	691600601000-xxx	160X60x1000									4,8	3,4
682000500400-xxx	692000500400-xxx	200x50x400	400	÷S	250	÷S	600	÷S	500	÷S	3,7	÷S
682000500600-xxx	692000500600-xxx	200x50x600									4,3	
682000501000-xxx	692000501000-xxx	200x50x1000									5,6	
682150700400-xxx	692150700400-xxx	215x70x400	415	325	270	178	700	445	500	298	4,1	3
682150700600-xxx	692150700600-xxx	215x70x600									4,9	3,7
682150701000-xxx	692150701000-xxx	215x70x1000									6,4	5,1
682400500400-xxx	692400500400-xxx	240x50x400	440	÷S	250	÷S	700	÷S	500	÷S	4,2	÷S
682400500600-xxx	692400500600-xxx	240x50x600									5	
682400501000-xxx	692400501000-xxx	240x50x1000									6,5	
683001000400-xxx	693001000400-xxx	300x100x400	500	410	300	208	900	530	500	328	5	4
683001000600-xxx	693001000600-xxx	300x100x600									6	5
683001001000-xxx	693001001000-xxx	300x100x1000									8	7
684001000400-xxx	694001000400-xxx	400x100x400	600	÷S	300	÷S	900	÷S	500	÷S	6,2	÷S
684001000600-xxx	694001000600-xxx	400x100x600									7,4	
684001001000-xxx	694001001000-xxx	400x100x1000									10	
680770560400-xxx	690770560400-xxx	500x100x400	700	610	300	208	900	730	500	328	6,8	6
680770560600-xxx	690770560600-xxx	500x100x600									8,4	7,5
680770561000-xxx	690770561000-xxx	500x100x1000									11,5	10,5

Code for Roof Membrane typer: 1xx & 2xx
Membrane on www.jual .dk
* Weight for SBS-Bituminous Membrane and Synthetic membrane Alcorplan.
Flange can be delivered factory bent 90° in desired height.
÷S: No synthetic Roof Membrane in this size
*Water drop edge on dimensions from 50x50mm.

ACCESSORIES



LEAF GRATE

JUAL recommend installation of leaf grates which must be checked / cleaned at appropriate intervals.

Leaf grates are to be ordered separately (Article number 72000HR - (Pipe width).